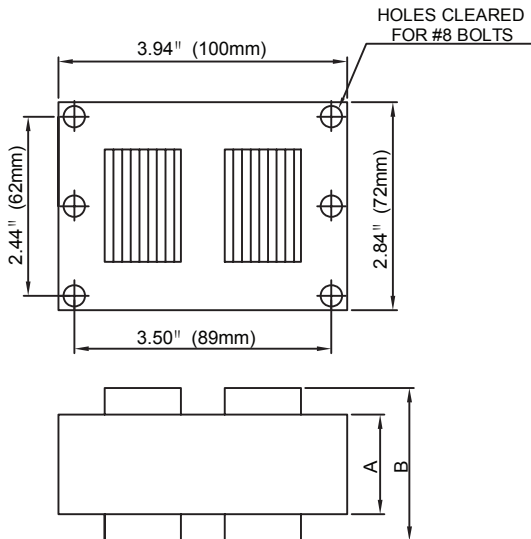



Plusrite®

CATALOG NUMBER: BAMH175-CWA/V5**175W M57****Metal Halide Lamp Ballast****60 Hz CWA****3X4 CORE.WMF**

Input Volts		120	208	240	277	480
Circuit Type	CWA					
REGULATION						
Line Volts	±10%					
Lamp Watts	±10%					
LINE CURRENT(Amps)						
Operating		1.85	1.10	0.90	0.80	0.40
Open Circuit		1.45	0.90	0.75	0.70	0.40
Starting		1.40	0.80	0.70	0.65	0.30
RECOMMENDED FUSE (Amps)		5	3	3	3	2
TEMPERATURE RATINGS						
Insulation Class	180 (H)					
Coil Temperature Code		B	C	C	B	B
Benchtop Coil Rise		77.8	80.0	81.3	76.1	76.1
Power Factor (Min)	90%					
Input Watts	215 W					
Efficiency						
NOM. OPEN CIRCUIT VOLTAGE	320					
INPUT VOLTAGE AT LAMP DROPOUT		55	90	95	120	240
MIN AMBIENT STARTING TEMP	-20°F/-30°C					

Capacitor:**Ignitor: None**

Microfarads: 10.0 uf
Volts (Min): 400 V
Case Temp(Max): 100°C
D: 1.57 in
L: 2.76 in
A: 0.63 in

**No Ignitor Needed****60 HZ TEST PROCEDURES**

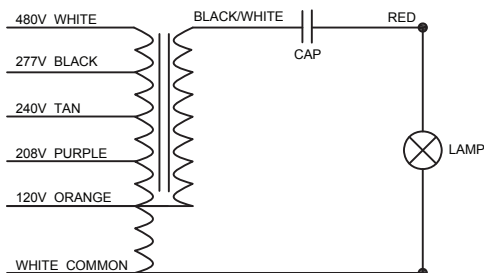
High Potential Test (Volts)					
1 Minute	1,650 V				
1 Second	2,000 V				
Open Circuit Voltage Test (V)	290 - 360				
Short Circuit Current Test (A)					
Secondary Current					
Min	1.55				
Max	1.95				
Input Current					
Min	1.05	0.60	0.50	0.45	0.30
Max	1.65	0.95	0.85	0.70	0.50

CORE and COIL Specifications

Dimension A (in)	2.44
Dimension B (in)	4.02
Weight (lbs)	7.0
Lead Lengths (in)	12

CAPACITOR REQUIREMENT

Microfarads	10.0 uf
Volts (Min)	400 V

Wiring Diagram:**cALUS RoHS****PACKAGING**

Width (inch)	3.93
Depth (inch)	6.49
Height (inch)	4.84
Weight (inch) Individual	7.37

ORDERING INFORMATION

The ballast is prewired and comes with a kit including capacitor and bracket.

Data is based upon tests performed by Plusrite in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Coil material: Cu/Al